





POLYMER



See video
16 ÷ 63 mm

QLTRPA	Reducing Tee								
Codice	Gr	D	D1	L	E	E1	H	C	C1
QLTRPA020016	150	20	16	127	45	38	80	48	49,80
QLTRPA025016	200	25	16	140	52	38	88	52	49,80
QLTRPA025020	210	25	20	140	52	45	98	52	54,80
QLTRPA032020	340	32	20	170	62	45	111	62	61,90
QLTRPA032025	340	32	25	170	62	52	113	62	61,90
QLTRPA040020	494	40	20	186	76	45	123	70	71,00
QLTRPA040025	510	40	25	185	76	52	128	70	71,00
QLTRPA040032	540	40	32	185	76	62	131	70	71,00
QLTRPA050020	738	50	20	220	88	45	137	81	79,70
QLTRPA050025	735	50	25	220	88	52	138	81	79,70
QLTRPA050032	760	50	32	220	88	62	147	79	79,70
QLTRPA050040	820	50	40	220	88	76	150	79	79,70
QLTRPA063020	1027	63	20	235	108	45	153	80	79,50
QLTRPA063025	1041	63	25	235	108	52	153	80	79,5
QLTRPA063040	820	63	40	235	108	76	160	80	79,50
QLTRPA063050	1120	63	50	235	108	87	168	80	79,50

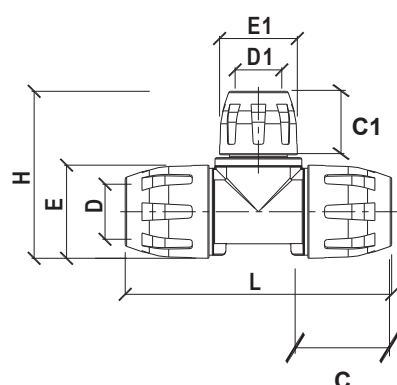

Legend

α	Angular
C	Socket depth
C1	Socket depth 1
D	Socket diameter
D1	Socket diameter 1
Dp	Hollow mill driving diameter
Dpt	Largeness
d	Thread diameter
d1	Thread diameter 1
d2	Thread diameter 2
d3	Thread diameter 3
E	Overall outside diameter ring nut
E1	Overall outside diameter ring nut 1
Gr	Weight in grams
H	Height
On	holes number
L	Length
L1	Length 1
L2	Length 2
L Axial	Axial Length / Wheelbase
I	Misalignment
I1	Misalignment 1
r	Curvature radius (max)

QUICK LINE SYSTEM TECHNICAL SCHEDULE