


# TIMER

The Timer is part of Metal Work range of logic elements, which also includes OR, AND, NOT, YES, MEMORY.

The value of the signal output delay is set by rotating a knob. It can work both as 3/2 NC and 3/2 NO, depending on whether feeding is through port "a" or port "b".

The maximum delay time can be increased by unscrewing a plug and connecting the port to an external auxiliary tank.

- Adaptor for  $\Omega$  bar (DIN EN 50022) integrated in the body.
- Pressure indicator via an orange pin
- Pipe clamping system using  $\varnothing 4$  built-in push-on fittings.

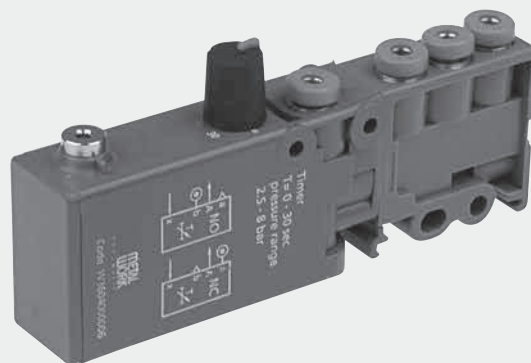

## TECHNICAL DATA

Temperature range	°C	- 10 to + 60
Valve coupling	mm	Push-in fitting for $\varnothing 4$ pipe
Pressure range	bar	From 2.5 to 8
Minimum pilot pressure	bar	2.5
Nominal diameter	mm	2.7
Flow rate at 6 bar (0.6 Mpa, 87 psi) $\Delta P$ 1 bar (0.1 Mpa, 14.5 psi)	NI/min	100
Delay setting range	s	From 0 to 30, at 6 bar
Signal shutoff time	s	< 0.1
Repeatability	s	$\pm 0.4$
Fluid		Filtered, lubricated or unlubricated compressed air. If used, must be continuous
Operating		By compressed air
Repositioning		By mechanical spring
Installation		In any direction
Assembly		On $\Omega$ bar (DIN EN 50022) size 35 x 7 or 35 x 15 - Wall mounting using $\varnothing 4.2$ holes
<b>MATERIALS</b>		
Body		Anodized aluminium / Technopolymer
Internal parts		Brass / Technopolymer
Gaskets		NBR
Spring		Spring steel

## DIMENSIONS AND ORDERING CODES

Code	Description
W3604000006	Timer

