

Mounting clip, Series AS2-MBR-...-W03

- Polyamide



Ambient temperature min./max.

-10 ... 50 °C

Weight

0,015 kg

Technical data

Part No.
R412006370

Scope of delivery incl. 2 mounting screws M3x53-4.8-A2R according to EN ISO 7046-1 (countersunk screw with type H X-slot), 1x O-ring


Suitable for use in Ex zones 1, 2, 21, 22.

Technical information

Material	
Housing	Polyamide
Seal	Acrylonitrile butadiene rubber

Dimensions

Dimensions in mm

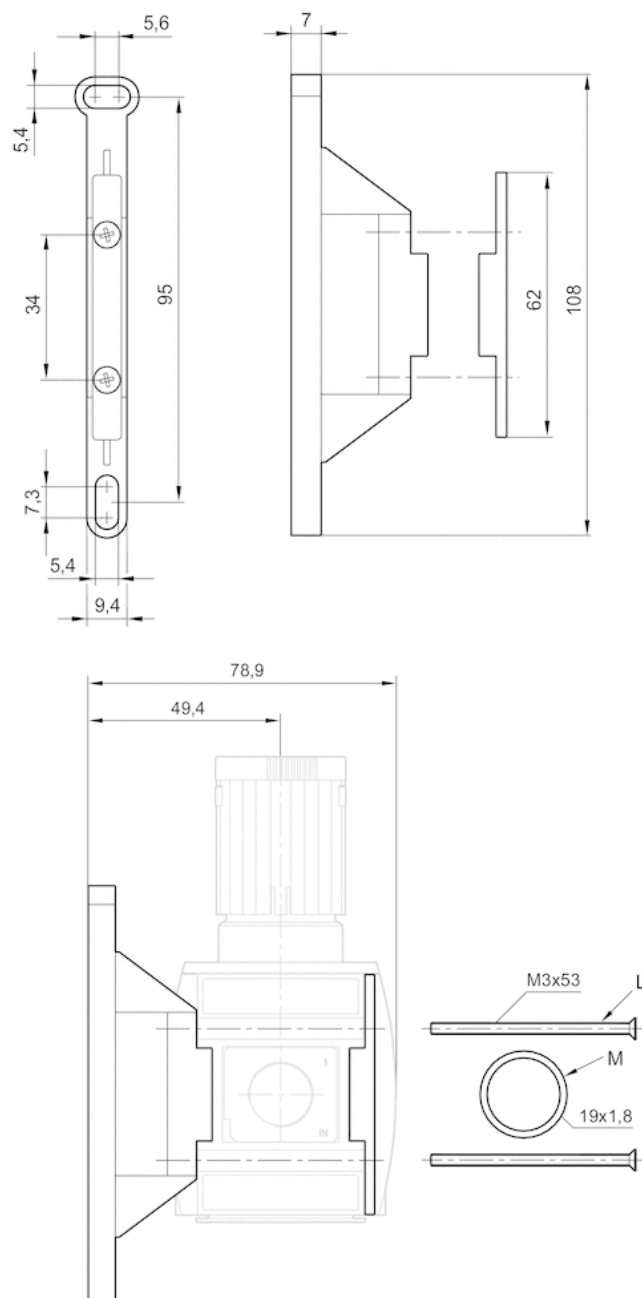

L = Mounting screw


M = O-ring

Mounting clip, Series AS3-MBR-...-W03

R412007370

Series AS3

■ $Q_n = [[14500] \text{ l/min}]$

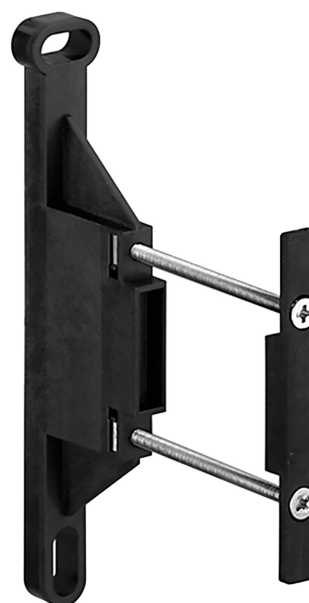

Technical data

Industry
Industrial

Min. ambient temperature
-10 °C


Max. ambient temperature
50 °C

Weight
0.055 kg

Housing material
Polyamide

Seal material
Acrylonitrile butadiene rubber

R412007370

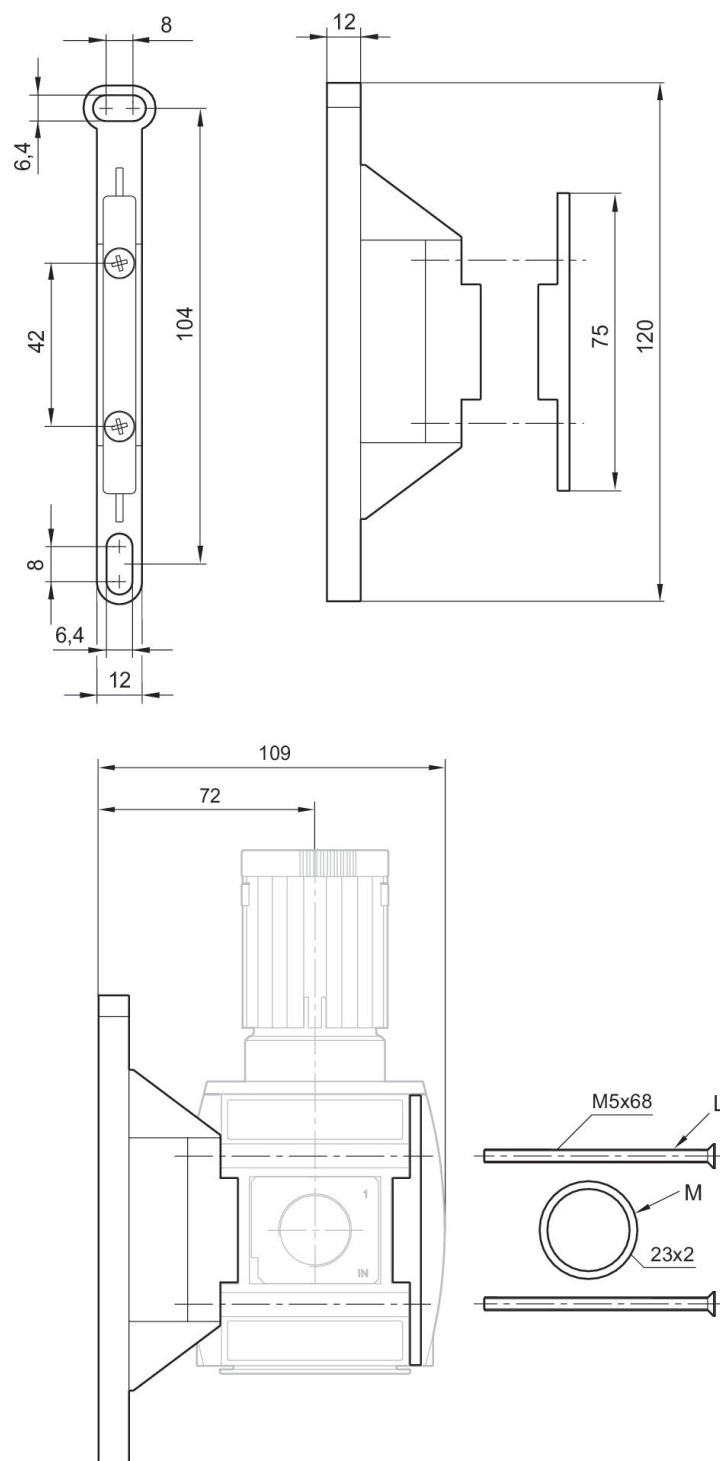

Mounting clip, Series AS5-MBR-...-W03

- Polyamide



Ambient temperature min./max.
Weight

-10 ... 50 °C
0,12 kg

Technical data

Part No.
R412009370


Scope of delivery incl. 2 mounting screws M6x90-4.8-A2R according to EN ISO 7046-1 (countersunk screw with type H X-slot), 1x O-ring

Suitable for use in Ex zones 1, 2, 21, 22.

Technical information

Material	
Housing	Polyamide
Seal	Acrylonitrile butadiene rubber

Dimensions

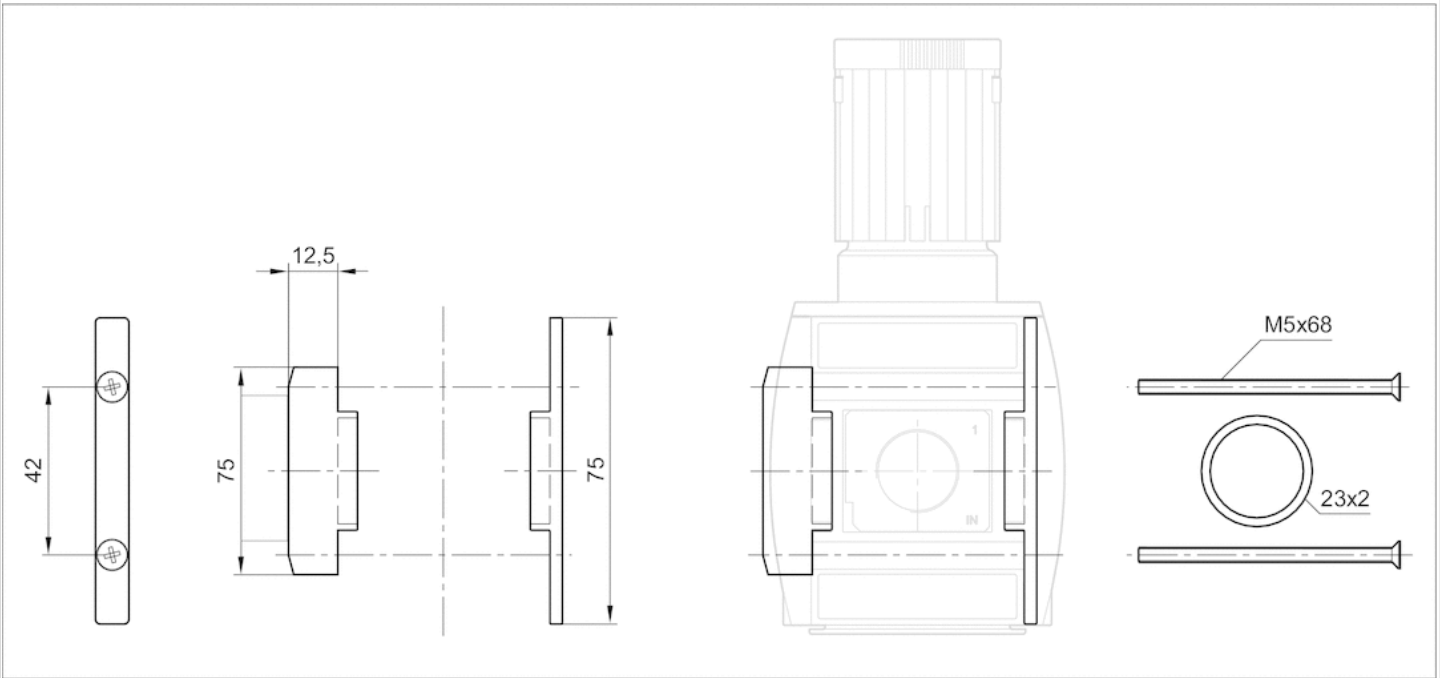

Mounting clip, Series AS1-MBR-...-W03

- Polyamide



Ambient temperature min./max.
Weight

-10 ... 50 °C
0,025 kg

Technical data

Part No.
R412014757

Scope of delivery incl. 2 mounting screws M3x53-4.8-A2R according to EN ISO 7046-1 (countersunk screw with type H X-slot), 1x O-ring

Technical information

Material	
Housing	Polyamide
Seal	Acrylonitrile butadiene rubber

Dimensions

Dimensions in mm

