

# IN-LINE SOLENOID VALVE SERIES SOV L



SOV L solenoid valves belong to the LINE ON LINE® family, which means they can be connected to all the other components in series or in parallel. Available in the version for pipe-pipe connection with two push-in fittings, and in the version for thread-pipe connection with a brass nickel-plated male thread and a push-in fitting.


Though small in size, SOV L valves are solenoid-piloted and feature very high performance.

The spool distributor is fitted with special polyurethane gaskets to ensure a very long working life.

Each valve comes complete with a monostable manual control and LED.

The electrical connection can be the PLUG-IN type or the type with an M8 3 PIN IP65 threaded fitting.

Exhaust can be damped with an annular silencer or conveyed via a pipe fitting. The fitting for conveyed exhaust can be oriented freely.

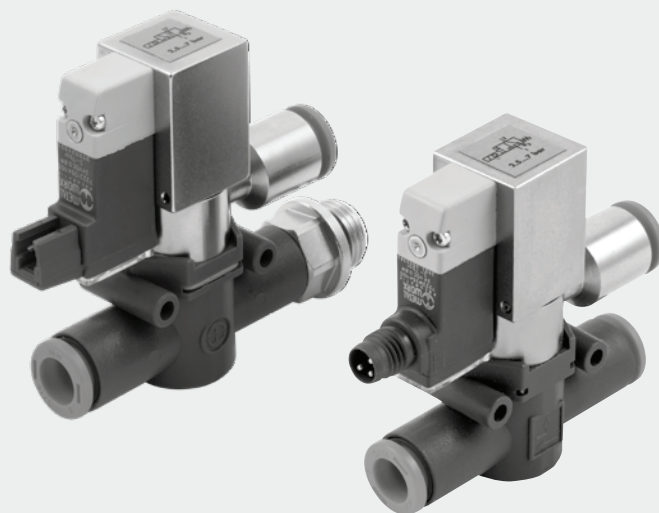


TECHNICAL DATA		Ø 6	Ø 1/4	Ø 8 (Ø5/16")
Operating pressure	MPa	0.3 to 0.7		
	bar	3 to 7		
	psi	43.5 to 101		
Temperature range	°C	5 to 50		
	°F	41 to 122		
Flow rate at 6.3 bar ΔP 0.5 bar	NI/min	270	270	500
Flow rate at 6.3 bar ΔP 1 bar	NI/min	380	380	700
Conductance C	NI/min-bar	95.8	95.8	178.1
Coefficient b	bar/bar	0.145	0.145	0.129
Voltage	VDC	24		
Power		0.9		
Recommended pipe		Rilsan PA11 - Nylon 6 - Polyamide 12 - Polypropylene		
Fluid		Lubricated or unlubricated filtered compressed air; if used, must be continuous		
Compatibility with oils		See chapter Z1		
Type of electrical connection		PLUG-IN - M8 3 PIN IP65 threaded fitting		


## ASSEMBLY OPTIONS

Ⓐ


G (BSP)




UNF or NPT



Ⓑ



Ⓒ




How to mount the SOV L:


- Fig. Ⓐ **G (BSP)**: With the male threaded port it is possible to mount the SOV L straight onto the actuator.  
**UNF or NPT**: Adding a RU6 fitting, with his male UNF or NPT thread, it is possible to mount the SOV L straight on to the actuator or the control valve.
- Fig. Ⓑ Fixing to the plate with the special SQU L bracket.
- Fig. Ⓒ There are two robust rings on the plastic body for fixing the SOV L straight onto the wall.

# SOV L 3/2 NC-NO PIPE - PIPE SILENCED EXHAUST

## PLUG-IN VERSION

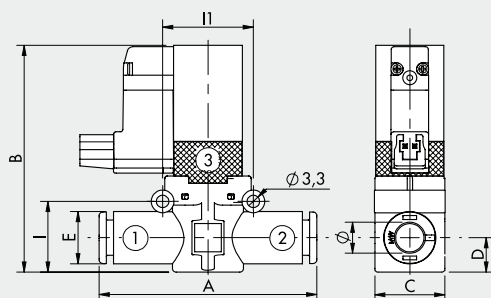


## M8 VERSION

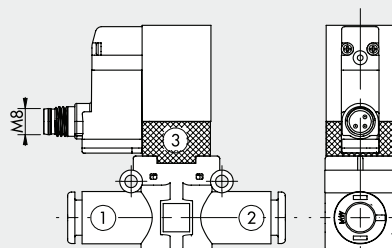

## M8 CONNECTION

- 1 Not used  
3 0 V (Operation also with reverse polarity)  
4 +24V



Code	Ref..	Ø	A	B	C	D	E	I	I1	Electrical connection
9069016	SOV L 3/2 NC Ø6-Ø6	6	49.4	57.5	14.7	6.4	11.4	14.6	20	PLUG-IN
906M016	SOV L 3/2 NC Ø6-Ø6 M8									M8
9069116	SOV L 3/2 NO Ø6-Ø6									PLUG-IN
9069016U	SOV L 3/2 NC Ø1/4-Ø1/4	1/4	49.4	57.5	14.7	6.4	11.4	14.6	20	PLUG-IN
906M016U	SOV L 3/2 NC Ø1/4-Ø1/4 M8									M8
9069116U	SOV L 3/2 NO Ø1/4-Ø1/4									PLUG-IN
9069024	SOV L 3/2 NC Ø8-Ø8	8 ▲	57.3	63.5	18.7	9.1	13.8	18.7	24	PLUG-IN
906M024	SOV L 3/2 NC Ø8-Ø8 M8									M8
9069124	SOV L 3/2 NO Ø8-Ø8									PLUG-IN

▲ Ø8 = Ø5/16"