


Quick Line Fittings diam 20 ÷ 80 mm

QLMMMAL						
Nipple Socket - Aluminium body - male threaded						
Code	Gr.	D	d	L	E	C
QLMMMAL020048	43	20	1/2"	53	38	37
QLMMMAL020068	45	20	3/4"	53	38	37
QLMMMAL025068	63	25	3/4"	58	45	45
QLMMMAL025088	68	25	1"	58	45	45
QLMMMAL032108	150	32	1.1/4"	81	56	56
QLMMMAL040128	322	40	1.1/2"	94	62	77
QLMMMAL050168	457	50	2"	106	81	75
QLMMMAL063168	518	63	2"	130	97	95
QLMMMAL063208	545	63	2.1/2"	130	97	95
QLMMMAL080208	907	80	2.1/2"	152	116	114
QLMMMAL080248	1027	80	3"	155	116	114

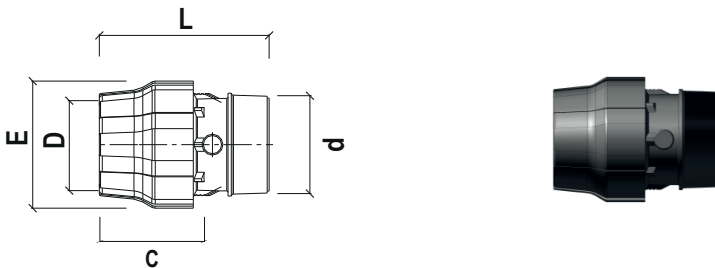

Legend

α	Angular
C	Socket depth
C1	Socket depth 1
D	Socket diameter
D1	Socket diameter 1
Dp	Hollow mill driving diameter
Dpt	Largeness
d	Thread diameter
d1	Thread diameter 1
d2	Thread diameter 2
d3	Thread diameter 3
E	Overall outside diameter ring nut
E1	Overall outside diameter ring nut 1
Gr	Weight in grams
H	Height
On	holes number
L	Length
L1	Length 1
L2	Length 2
L Axial	Axial Length / Wheelbase
I	Misalignment
I1	Misalignment 1
r	Curvature radius (max)