

FR + LUB bit



- Compact FR + L unit with rolling diaphragm.
- High flow rates with reduced pressure drop
 - Excellent degree of condensate separation
 - Quantity of lubricant proportioned to air flow
 - Activates at low flow rates




TECHNICAL DATA	FR + L BIT 1/8"	FR + L BIT 1/4"
Threaded port	1/8"	1/4"
Setting range	0 to 2 - 0 to 4 - 0 to 8 - 0 to 12	
Degree of filtration	5 (yellow) 20 (white) 50 (blue)	
Type of lubrication	Oil mist	
Max. inlet pressure	MPa	1.3
	bar	13
	psi	188
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 0.5 bar (0.05 MPa to 7 psi)	Nl/min	140
	scfm	5
Flow rate at 6.3 bar (0.63 MPa to 91 psi) ΔP 1 bar (0.1 MPa to 14 psi)	Nl/min	260
	scfm	9.2
Max temperature at 1 MPa; 10 bar; 145 psi	°C	50
	°F	122
Weight	g	170
Wall fixing screws	M4 by means of the bracket provided	
Gauge port	G1/8"	
Mounting position	Vertical	
Condensate drain	RMSA: drain with manual condensate discharge and automatic discharge at zero pressure SAC: automatic drain with condensate discharge.	
Fluid	Operates by pressure drop – requires variable air take-offs. Compressed air	
Notes	See chapters regarding individual elements.	

UNITS

FR + LUB bit

DIMENSIONS

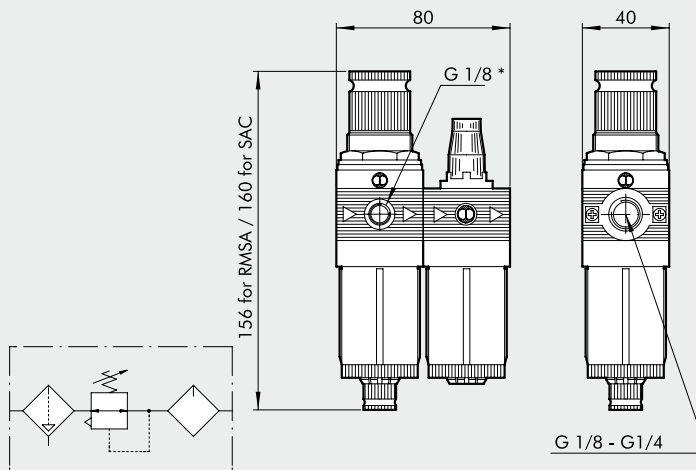

* Pressure gauge port

