


QLRIDPA	Reduction								
	Code	Gr	D	D1	L	E	E1	C	C1
QLRIDPA020016	100	20	16	X	45	37	49,80	38,80	
QLRIDPA025020	120	25	20	101	51	45	54,80	49,80	
QLRIDPA032025	178	32	25	115	61	51	61,90	54,80	
QLRIDPA040025	230	40	25	125	75	61	71,00	54,80	
QLRIDPA040032	290	40	32	133	75	51	71,00	61,90	
QLRIDPA050040	450	50	40	151	87	75	79,70	71,00	
QLRIDPA063040	710	63	40	X	108	75	79,50	71,00	
QLRIDPA063050	710	63	50	X	108	87	79,50	79,70	



See video
16 ÷ 63 mm

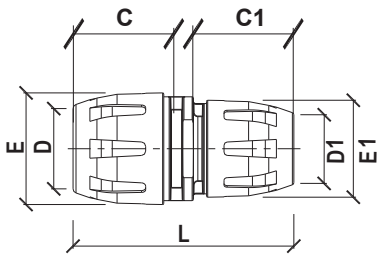

Legend

α	Angular
C	Socket depth
C1	Socket depth 1
D	Socket diameter
D1	Socket diameter 1
Dp	Hollow mill driving diameter
Dpt	Largeness
d	Thread diameter
d1	Thread diameter 1
d2	Thread diameter 2
d3	Thread diameter 3
E	Overall outside diameter ring nut
E1	Overall outside diameter ring nut 1
Gr	Weight in grams
H	Height
On	holes number
L	Length
L1	Length 1
L2	Length 2
L Axial	Axial Length / Wheelbase
l	Misalignment
l1	Misalignment 1
r	Curvature radius (max)