


# Coil to Suit Special Purpose Valve

22 mm

temperatura max di esercizio	<b>+50°C</b>	<i>max working temperature</i>
inserimento	<b>ED 100%</b>	<i>duty cycle</i>
protezione con connettore correttamente montato	<b>IP 65</b>	<i>protection with connector correctly mounted</i>
tolleranza di tensione	<b>± 10%</b>	<i>tension tolerance</i>

- a richiesta basso assorbimento 24V DC 1.5W: **00.196.0**  
*low consumption (24V DC 1.5W) on request: 00.196.0*

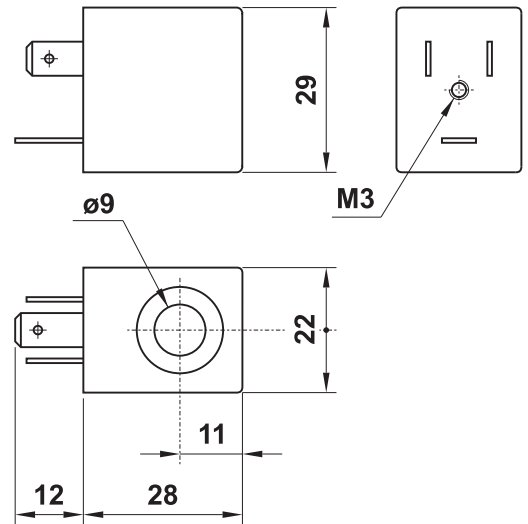

## BOBINE STANDARD a norma CE

code	tension	power	
		rated	inrush
<b>00.167.0</b>	12V DC	3W	
<b>00.028.0</b>	24V DC	3W	
<b>00.029.0</b>	24V 50/60Hz	5VA	7.5VA
<b>00.030.0</b>	110V 50/60Hz	5VA	7.5VA
<b>00.031.0</b>	220V 50/60Hz	5VA	7.5VA

## BOBINE SPECIALI classe H con certificato UL

code	tension	power	
		rated	inrush
<b>00.486.0</b>	24V DC	3W	
<b>00.487.0</b>	24V 50/60Hz	5VA	7.5VA
<b>00.488.0</b>	110V 50/60Hz	5VA	7.5VA